


Double Ended Compression Load Cell 10t ~ 50t


Feature

Double ended compression load cell construction with Alloy Steel and fully potted with special chemical & compounds to IP67 to protect the load cell from water and moisture attack.
High accuracy, stability & easy to install. Suitable For truck scale, rail scales & etc.

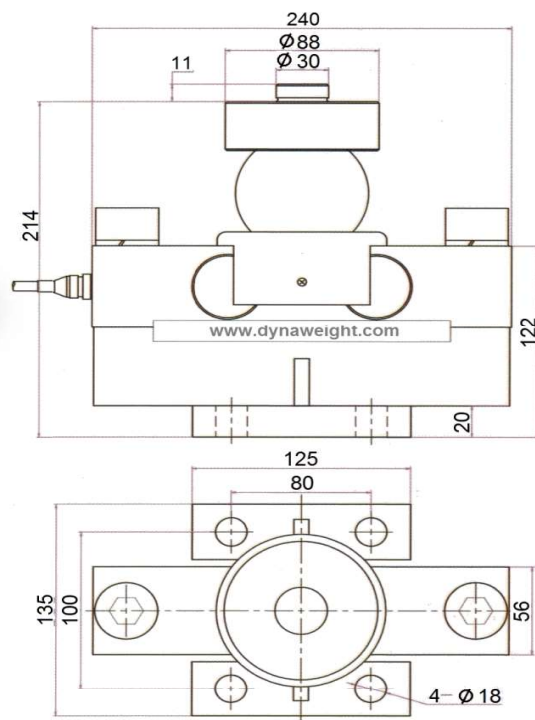

Specification

Capacity Load	10t, 20t, 30t, 40t, 50t
Rated Output	2.0mV / $\pm 0.1\%$
Input Impedance	700 $\Omega \pm 10 \Omega$
Output Impedance	700 $\Omega \pm 5 \Omega$
Rated Excitation	5 - 10VDC
safe Overload	120%
Safe Temp.Range	- 10 °C to + 70°C
Class	C3

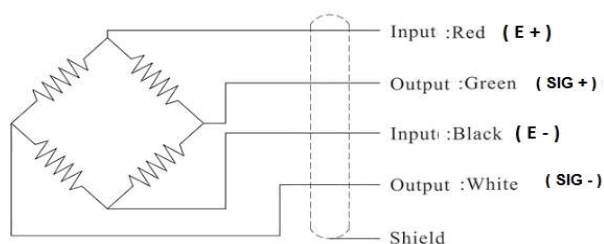

CHINA METROLOGY APPROVAL CERTIFICATION
CHINA PATTERN APPROVAL CERTIFICATION

Authorized Dealers

[http:// www.dynaweight.com](http://www.dynaweight.com)