

INTRODUCTION


The DW350KG suitable for belt scales, package systems, small hopper scales, bench scale and postal weighing.
Aluminum construction material with IP65 rating.
High accuracy & stability & easy to install.

DW350KG(M8)




IP65

SPECIFICATION

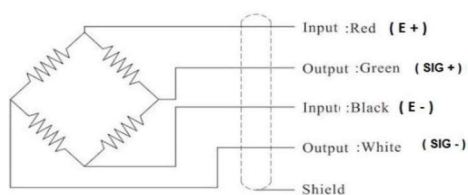

Capacity Range	30kg ~ 500kg
Rated Output	2.0mv
Zero Balance	± 1.5 % Of rated Output
Input Impedance	405 Ω ± 10 Ω
Output Impedance	350 Ω ± 5 Ω
Safe Overload	120%
Rated Excitation	5 - 10 VDC
Safe Temp.Range	- 10 °C to + 70°C

DIMENSION

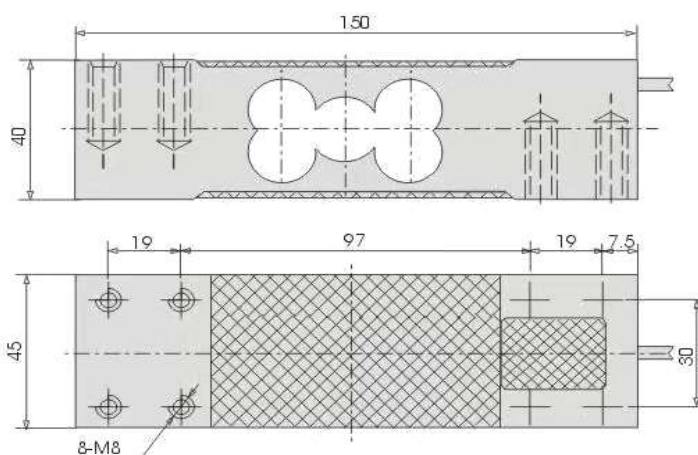

CHINA METROLOGY APPROVAL CERTIFICATION
CHINA PATTERN APPROVAL CERTIFICATION

Authorized Dealers

[http:// www.dynaweight.com](http://www.dynaweight.com)