

DW SERIES

Single Point Load Cell

INTRODUCTION

DW750KG(M8)

The DW750KG suitable for belt scales, package systems, small hopper scales, bench scale and postal weighing. Aluminum construction material with IP65 rating. High accuracy & stability & easy to install.



IP65 ∭

SPECIFICATION

Input :Red (E+) Output :Green (SIG+) Input :Black (E-) Output :White (SIG-)

Capacity Range 30kg ~ 1000kg

Rated Output 2.0mv


Zero Balance ± 1.5% Of rated Output

 $\begin{array}{ll} \text{Input Impedance} & 405 \ \Omega \pm 10 \ \Omega \\ \text{Output Impedance} & 350\Omega \pm 5 \ \Omega \\ \end{array}$

Safe Overload 120% Rated Excitation 5 - 10 VDC

Safe Temp.Range - 10 °C to + 70 °C

DIMENSION

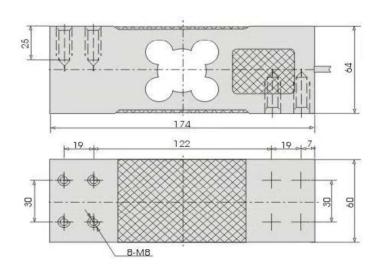

Authorized Dealers



http://www.dynaweight.com